



#### ISO8528

This generator set has been designed to meet ISO 8528 regulation.

#### SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

#### 2000/14/EC

Enclosed product is tested according to EU noise legislation 2000/14/EC

#### 3 Phase Ratings, 50 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kW	kVA	kW	Amp
400/230	11,00	8,80	10,00	8,00	14,00

Standby Rating (ESP):

Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP):

Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

#### STANDARD SPECIFICATIONS

Water cooled, Diesel engine  
Radiator with mechanical fan  
Protective grille for rotating and hot parts  
Electric starter and charge alternator  
Starting battery (with lead acid) including rack and cables  
Engine coolant heater  
Base frame design incorporates an integral fuel tank and anti-vibration isolators  
Flexible fuel connection hoses  
Single bearing, class H alternator  
Industrial exhaust silencer and steel bellows supplied separately  
Static battery charger  
Manual for application and installation

#### OPTIONAL EQUIPMENTS

##### ENGINE

- Remote Radiator Cooling

##### ALTERNATOR

- Main line circuit breaker

##### CONTROL SYSTEM

- Charge Ammeter

##### OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Manual oil drain pump
- Residential silencer
- Enclosure: weather protective or sound attenuated
- Tool kit for maintenance
- Main Fuel Tank

##### TRANSFER SWITCH

- Three or four pole contactor
- Three or four pole motor operated circuit breaker

## ➤ DIESEL ENGINE SPECIFICATIONS

Manufacturer		Mitsubishi	تولید کننده
Model		S3L2	مدل
No. of Cylinders and Build		3 Cylinder, In Line	تعداد سیلندرها و نوع آرایش آنها
Aspiration and Cooling		Naturally Aspirated	سیستم تنفس و خنک کاری
Maximum Standby Power		1500 rpm	توان Standby
		11,00 kW [15,00HP]	
Total Displacement	L	1,318	جابه جایی کل
Bore and Stroke	mm	78 x 92	قطر سیلندر و کورس پیستون
Compression Ratio		22:1	نسبت تراکم
Rated Speed (rpm)	rpm	1500	سرعت مجاز
Governor		Mechanical	گاورنر
Oil Capacity	L	4,20	ظرفیت روغن
Coolant Capacity	L	6,50	ظرفیت خنک کننده
Start System		12 V d.c.	استارت تر
Fuel Consumption	Load	%100	مصرف سوخت
	L/h	3,30	


## ➤ ALTERNATOR SPECIFICATIONS

Make		Stamford	تولید کننده
Model		PI 044F	مدل
Frequency	Hz	50	فرکانس
Power	kVA	12,50	توان
Design		Brushless, 4 poles	طراحی
Cos Phi		0,80	کسینوس فی
Phase		3	فاز
Voltage	V	400/230	ولتاژ
Current	A	18,00	جریان
Insulation Class		H	کلاس عایق بندی
Stator		2 / 3 steps	استاتور
Rotor		Single Bearing System, Flexible Disc	روتور
Excitation System		Electronic ( AVR )	سیستم تحریک

## ➤ DIEMENSIONS AND WEIGHT

Open Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AMT 11	330,00	1250,00	850,00	950,00	50,00
Canopy	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AK 10	510.00	1850	860	1060	50

## 1 P 602 - Control System

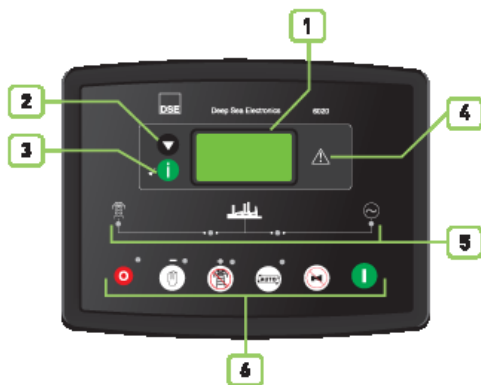

- 1 ● Main status display.
- 2 ● Display scroll button.
- 3 ● Page(information) button.
- 4 ● Common alarm indicator.
- 5 ● Status LED's.
- 6 ● Operation selecting buttons.

## 2 Devices

- DSE, model 6020 Auto Mains Failure control module.
- Battery charger input 198-264 volt , output 27,6 V 5 A (24 V) or 13,8 Volt 5A (12V)
- Emergency stop push button and fuses for control circuits.

## 3 Construction and Finish

- Components installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface. Polyester composite powder topcoat forms high gloss and extremely durable finish. Lockable and hinged panel door provides easy access to components.

## 4 Installation

- Control panel is mounted on baseframe with steel stand. Located at the right side of the generator set (When you look at the Gen.Set. from Alternator)

## 5 Generating Set Control Unit

- The DSE 6020 is a standard control module for our generator sets up to 200kVA and it have been designed to start and stop diesel and gas generator sets. The DSE 6020 module has been designed to monitor generator frequency, volt, current, engine oil pressure, coolant temperature running hours and battery volts. Module monitors the mains supply and switch over to the generator when the mains power fails. The DSE6020 also indicates operational status and fault conditions, Automatically shutting down the Gen. Set and giving true first up fault condition of Gen. Set failure. The LCD display indicates the fault.

### Standard Specifications

- Microprocessor controlled.
- LCD display makes information easy to read.
- 4-line, 64 x 132 pixel display.
- Automatically transfers between mains (utility) and generator power.
- Manual programming on front panel.
- User-friendly set-up and button layout.
- Front panel programming.
- Remote start.
- Event logging (10) showing date and time.
- Controls: Stop/Reset, Manual, Auto, Test, Start, buttons. An additional push button next to the LCD display is used to scroll through the modules' metering displays.

# AMT 11

## ➤ Instruments

### ENGINE

- Engine speed.
- Oil pressure.
- Coolant temperature.
- Run time.
- Battery volts.
- Configurable timing.

### GENERATOR

- Voltage (L-L, L-N).
- Current (L1-L2-L3).
- Frequency.

### MAINS

- Voltage (L-L, L-N).
- Frequency.
- Mains ready.
- Mains enabled.
- Gen. Set ready.
- Gen. Set enabled.

## ➤ Options

- Flexible sensor can be controlled with temperature, pressure, percentage (warning/shutdown/electrical trip)
- Local setting parameters and monitoring from PC to control module with USB connection (max 6 mt).

## ➤ Static Battery Charger

- Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency. Battery charger models' output V-I characteristic is very close to square and output is 5 amper, 13,8 V for 12 volt and 27,6 V for 24 V . Input 198 - 264 volt AC. Proline 2405 has fully output short circuit protection and it can be used as a current source. Proline 1205/2405 charger has high efficiency, long life, low failure rate, light weight and low heat radiated in accordance with linear alternatives. The charger is fitted with a protection diode across the output. Connect charge fail relay coil between positive output and CF output. They are equipped with RFI filter to reduce electrical noise radiated from the device. Galvanically isolated input and output typically 4kV for high reliability.

## ➤ Protection Circuits

### WARNING

- Charge failure.
- Battery Low/High voltage.
- Fail to stop.
- Low /High generator voltage.
- Under/over generator frequency.
- Over /Under speed.
- Low oil pressure.
- High coolant temperature.

### SHUT DOWNS

- Fail to start.
- Emergency stop.
- Low oil pressure.
- High coolant temperature.
- Over /Under speed.
- Under/over generator frequency.
- Under/over generator voltage.
- Oil pressure sensor open.
- Coolant temperature sensor open.


### ELECTRICAL TRIP

- Generator over current.

## ➤ Standards

- Electrical Safety / EMC compatibility BS EN 60950 Electrical business equipment.
- BS EN 61000-6-2 EMC immunity standard.
- BS EN 61000-6-4 EMC emission standard.

## AK 10 - Canopy

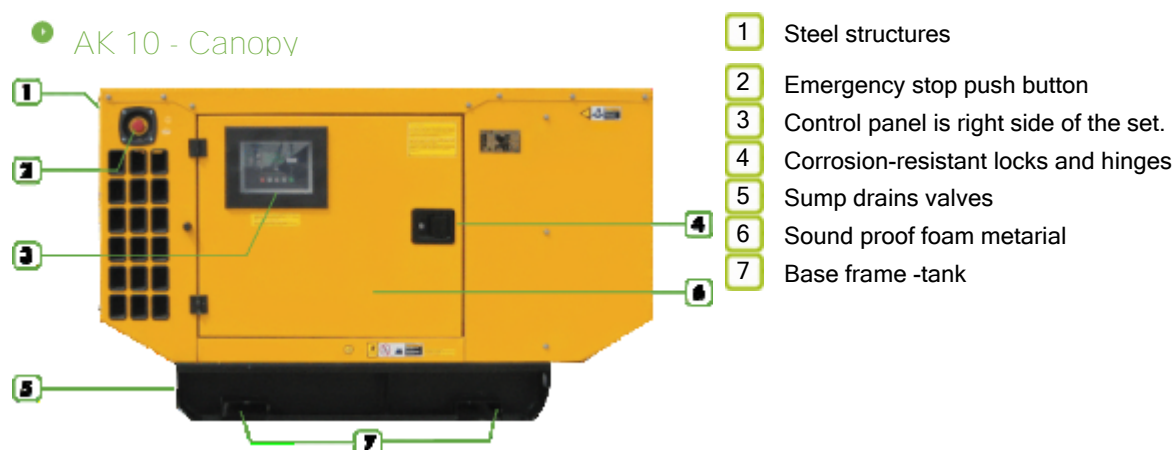

## Introduction

Sound-attenuated and Weather-protective Enclosures Sound-attenuated and weather protective enclosures for generating sets from abyaran, meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

## Standard Specifications

Compact footprint, low profile design.

Enclosure, generator set, exhaust system and fuel tank are pre-assembled, pre-integrated and shipped as one package

Body made from steel components treated with polyester powder coating

Fire retardant foam insulation

Easy access to all service points

Exhaust system inside canopy

Large doors on each side

Control panel viewing window in a lockable access door

Emergency stop push button mounted on enclosure exterior

Cooling fan and battery charging alternator fully guarded

Fuel fill and battery can only be reached via lockable access doors.

Lifting points on the top of canopy and base frame

Customer options available to meet your applications needs. abyaran

makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

Width	mm.	860
Length	mm.	1850
Height	mm.	1060
Fuel Tank Capacity	L	50