



ISO8528

This generator set has been designed to meet ISO 8528 regulation.

SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

2000/14/EC

Enclosed product is tested according to EU noise legislation 2000/14/EC

3 Phase Ratings, 60 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kW	kVA	kW	Amp
480/277		1540,00		1288,00	1936,00
380/220		1540,00		1288,00	2446,00
208/120		1540,00		1288,00	2234,00

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

STANDARD SPECIFICATIONS

- Heavy duty, water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket water heater
- Steel base frame and anti-vibration isolators
- Spare fuel tank(open set)
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel bellows supplied separately
- Static battery charger
- Manual for application and installation

AC 1540-6

1 OPTIONAL EQUIPMENTS

ENGINE

- Remote Radiator Cooling
- Fuel-Water Separator Filter
- Oil heater

ALTERNATOR

- Anti-Condensation Heater
- Over sized alternator
- Main line circuit breaker

CONTROL SYSTEM

- Automatic synchronising and power control system (multi gen-set Parallel)
- Parallel system with mains.
- Transition synchronization with mains
- Remote annunciator panel
- Remote relay output
- Alarm output relays
- Remote communication with modem
- Earth fault, single set
- Charge Ammeter

OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Electrical oil drain pump
- Low and high fuel level alarm
- Residential silencer
- Enclosure: weather protective or sound attenuated
- Duct adapter (on radiator)
- Inlet and outlet motorised louvers
- Inlet and outlet acoustic baffles
- Trailer
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Double wall chassis
- Supplied with oil and coolant - 30 °C
- Main Fuel Tank
- Automatic transfer switch

TRANSFER SWITCH

- Motor Switch

➤ DIESEL ENGINE SPECIFICATIONS

Manufacturer		Cummins	تولید کننده		
Model		KTA 50-G9	مدل		
No. of Cylinders and Build		16-cylinder, V - Type	تعداد سیلندرها و نوع آرایش آنها		
Aspiration and Cooling		Turbo Charged and After Cooled	سیستم تنفس و خنک کاری		
Total Displacement	L	50,300	جابه جایی کل		
Bore and Stroke	mm	159 X 159	قطر سیلندر و کورس پیستون		
Compression Ratio		13,9:1	نسبت تراکم		
Rated Speed (rpm)	rpm	1800	سرعت مجاز		
Governor		Electronic	گاورنر		
Oil Capacity	L	204,00	ظرفیت روغن		
Coolant Capacity	L	643,00	ظرفیت خنک کننده		
Intake Air Flow	m ³ /min.	124,50	جریان هوای مصرفی		
Exhaust Gas Flow	m ³ /min.	301,00	جریان گاز خروجی از اگزوز		
Exhaust Gas Temperatures	° C	515,00	دمای گاز خروجی از اگزوز		
Start System		24 V d.c.	استارتر		
Fuel Consumption	Load	%100	%75	%50	مصرف سوخت
	L/h	330,00	257,00	180,00	


➤ ALTERNATOR SPECIFICATIONS

Make		Stamford	تولید کننده
Model		PI 734E	مدل
Frequency	Hz	60	فرکانس
Power	kVA	1840,00	توان
Design		Brushless, 4 poles	طراحی
Cos Phi		0,80	کسینوس فی
Phase		3	فاز
Voltage	V	480/277	ولتاژ
Current	A	2766,00	جریان
Insulation Class		H	کلاس عایق بندی
Temperatur		H	دما
Stator		2 / 3 steps	استاتور
Rotor		Single Bearing System, Flexible Disc	روتور
Excitation System		Electronic (AVR)	سیستم تحریک

➤ DIEMENSIONS AND WEIGHT

Open Type	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AC 1540-6	10700,00	5650,00	2150,00	2550,00	2000,00
Canopy	Dry Weight	Lenght	Width	Height	Tank Capacity
	kg.	mm.	mm.	mm.	L
AKS 101	16700.00	9130	2440	2591	1200

1 P 732 control system - Control System

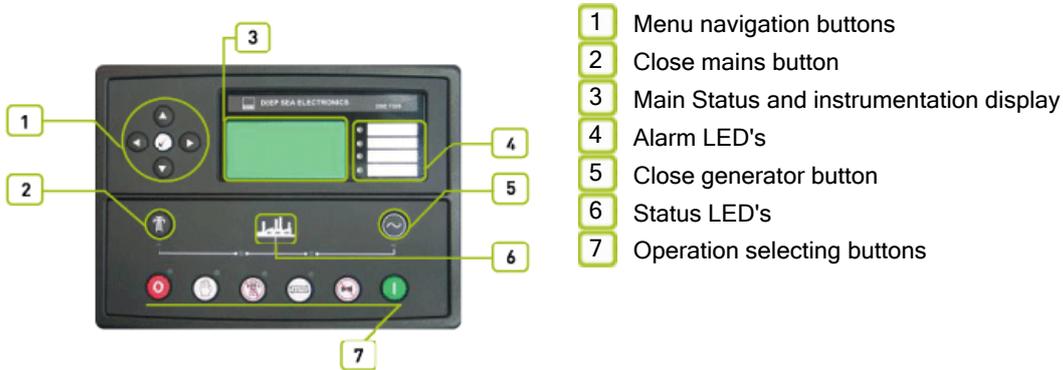

1 Devices

DSE, model 7320 Auto Mains Failure control module
Static battery charger
Emergency stop push button and fuses for control circuits

1 Construction and Finish

Components installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface
Polyester composite powder topcoat forms high gloss and extremely durable finish
Lockable hinged panel door provides for easy component access

1 Installation

Control panel is mounted generating set baseframe on robust steel stand or power module.
Located at side of generating set with properly panel visibility.

1 Generating Set Control Unit

The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines. The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch. The DSE 7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

Standard Specifications

Microprocessor controlled
132 x 64 pixel LCD display makes information easy to read
Front panel programming and also via PC software
Soft touch membrane keypad and five key menu navigation
Remote communications via RS232, RS485 and ethernet and SMS messaging
Event logging (50) showing date and time
Multiple date and time engine exercise mode and maintenance scheduler
Engine block heater control.
Controls; stop, manual, auto, test, start, mute lamb test/transfer to generator, transfer to mains, menu navigation.

• Instruments

ENGINE
Engine speed
Oil pressure
Coolant temperature
Run time
Battery volts
Engine maintenance due
GENERATOR
Voltage (L-L, L-N)
Current (L1-L2-L3)
Frequency
Earth current
kW
Pf
kVAh
kWh, kVAh, kVAh
Phase sequence
MAINS
Voltage (L-L, L-N)
Frequency

• Protection Circuits

WARNING
Charge failure
Battery under voltage
Fail to stop
Low fuel level (opt.)
kW over load
Negative phase sequence
Loss of speed signal
PRE-ALARMS
Low oil pressure
High engine temperature
Low engine temperature
Over /Under speed
Under/over generator
frequency
Under/over generator
voltage
ECU warning
SHUT DOWNS
Fail to start
Emergency stop
Low oil pressure
High engine temperature
Low coolant level
Over /Under speed
Under/over generator
frequency
Under/over generator voltage
Oil pressure sensor open
Phase rotation
ELECTRICAL TRIP
Earth fault
kW over load
Generator over current
Negative phase sequence

• Options

High oil temperature shut down
Low fuel level shut down
Low fuel level alarm
High fuel level alarm
EXPANSION MODULES
Editional LED module (2548)
Expansion relay module (2157)
Expansion input module (2130)

• Standards

Electrical Safety / EMC compatibility
BS EN 60950 Electrical business equipment
BS EN 61000-6-2 EMC immunity standard
BS EN 61000-6-4 EMC emission standard

• Static Battery Charger

Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency. Battery charger models' output V-I characteristic is very close to square 2405 has fully output short circuit protection and it can be used as a current source.

2405 charger has high efficiency, long life, low failure rate, light weight and low heat radiated in accordance with linear alternatives.

The charger is fitted with a protection diode across the output. Charge fail output is available. Connect charge fail relay coil between positive output and CF output.

Input: 196-264V.

Output: 27,6V 5A or 13,8V 5A.

AKS 101 - Canopy



Introduction

Sound-attenuated and weather protective enclosures for generating sets from abayaran meet event the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our sound insulated containers provide ease of access for servicing and general maintenance permitting on-site. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Standard Specifications

Robustly constructed walk in enclosure designed provide the necessary weather protection, sound attenuation and ventilaton for the generator and switchgear.

Ribbed aluminium sheet internal floor

Ceiling mounted fluorescent light fittings

RAL 9010 white painted finish

Corner fittings to ISO 1161, providing four point lifting capability for full wet weight

Personel access doors and internal panic relase button on one of door.

Exhaust silencer is horizontally mounted on top of enclosure roof and available dependant on size of generators and options selected

Protective grille for fan, rotating parts and hot parts

Removable enclosure roof

Steel ladder for roof

Fuel tank complete with retention bund, contents gauge, vent and manual fuel fill point

Power cable outlet on lower section abayaran

makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been aproved by the notified body Szutest

Width	mm.	2440
Lenght	mm.	9130
Height	mm.	2591
Fuel Tank Capacity		1200