

ISO8528

This generator set has been designed to meet ISO 8528 regulation.

SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

2000/14/EC

Enclosed product is tested according to EU noise legislation 2000/14/EC

3 Phase Ratings, 60 Hz, PF 0,8

Voltage	Standby Rating (ESP)		Prime Rating (PRP)		
	kVA	kw	kVA	kw	Amp
480/277		290,00		263,00	395,00
380/220		290,00		263,00	500,00
208/120		290,00		263,00	912,00

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

STANDARD SPECIFICATIONS

Water cooled, Diesel engine
Radiator with mechanical fan
Protective grille for rotating and hot parts
Electric starter and charge alternator
Starting battery (with lead acid) including rack and cables
Engine coolant heater
Base frame design incorporates an integral fuel tank and anti-vibration isolators
Flexible fuel connection hoses
Single bearing, class H alternator
Industrial exhaust silencer and steel bellows supplied separately (for open sets)
Static battery charger
Manual for application and installation

OPTIONAL EQUIPMENTS

ENGINE

- Remote Radiator Cooling
- Fuel-Water Separator Filter
- Oil heater

ALTERNATOR

- Anti-Condensation Heater
- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker

CONTROL SYSTEM

- Automatic synchronising and power control system (multi gen-set Parallel)
- Parallel system with mains.
- Transition synchronization with mains
- Remote annunciator panel
- Remote relay output
- Alarm output relays
- Remote communication with modem
- Earth fault, single set
- Charge Ammeter

OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Manual oil drain pump
- Electrical oil drain pump
- Low and high fuel level alarm
- Residential silencer
- Enclosure: weather protective or sound attenuated
- Duct adapter (on radiator)
- Inlet and outlet motorised louvers
- Inlet and outlet acoustic baffles
- Trailer
- Tool kit for maintenance
- Double wall chassis
- Supplied with oil and coolant - 30 °C
- Battery isolating switch
- Main Fuel Tank
- Automatic transfer switch

TRANSFER SWITCH

- Three Pole Contactor
- Four Pole Contactor
- Three or four pole motor operated circuit breaker

➤ DIESEL ENGINE SPECIFICATIONS

Manufacturer		Cummins	تولید کننده
Model		NT855-G6	مدل
No. of Cylinders and Build		6 Cylinder, In Line	تعداد سیلندرها و نوع آرایش آنها
Aspiration and Cooling		Turbo Charged	سیستم تنفس و خنک کاری
Maximum Standby Power		1800 rpm 325,00 kw [435,00HP]	توان Standby
Total Displacement	L	14,000	جابه جایی کل
Bore and Stroke	mm	140x152	قطر سیلندر و کورس پیستون
Compression Ratio		14,0:1	نسبت تراکم
Rated Speed (rpm)	rpm	1800	سرعت مجاز
Governor		Electronic	گاورنر
Oil Capacity	L	38,60	ظرفیت روغن
Coolant Capacity	L	66,00	ظرفیت خنک کننده
Intake Air Flow	m ³ /min.	24,40	جریان هوای مصرفی
Exhaust Gas Flow	m ³ /min.	68,00	جریان گاز خروجی از اگزوز
Exhaust Gas Temperature	° C	524,00	دمای گاز خروجی از اگزوز
Start System		24 V d.c.	استارتر
Fuel Consumption	Load	%100 %75 %50	مصرف سوخت
	L/h	74,00 56,00 40,00	


➤ ALTERNATOR SPECIFICATIONS

Make		Stamford	تولید کننده
Model		HCI444E	مدل
Frequency	Hz	60	فرکانس
Power	kw	352,00	توان
Design		Brushless, 4 poles	طراحی
Cos Phi		0,80	کسینوس فی
Phase		3	فاز
Voltage	V	480/277	ولتاژ
Current	A	529,00	جریان
Insulation Class		H	کلاس عایق بندی
Temperature		H	دما
Stator		2 / 3 steps	استاتور
Rotor		Double Bearing System, Flexible Disc	روتور
Excitation System		Electronic (AVR)	سیستم تحریک

➤ DIEMENSIONS AND WEIGHT

Open Type	Dry Weight kg.	Lenght mm.	Width mm.	Height mm.	Tank Capacity L
AC 290-6	3130,00	3058,00	1550,00	2071,00	700,00
Canopy	Dry Weight kg.	Lenght mm.	Width mm.	Height mm.	Tank Capacity L
MS 70	4200	4460	1606	2477	700

1 P 732 control system - Control System

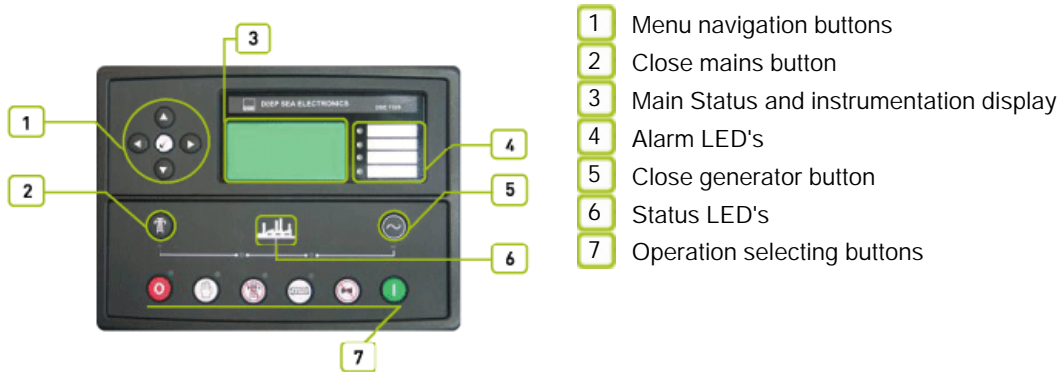

2 Devices

DSE, model 7320 Auto Mains Failure control module
Static battery charger
Emergency stop push button and fuses for control circuits

3 Construction and Finish

Components installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface
Polyester composite powder topcoat forms high gloss and extremely durable finish
Lockable hinged panel door provides for easy component access

4 Installation

Control panel is mounted generating set baseframe on robust steel stand or power module.
Located at side of generating set with properly panel visibility.

5 Generating Set Control Unit

The DSE 7320 control module is a standard addition to our generator sets from 220 kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non electronic engines. The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch. The DSE 7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

Standard Specifications

Microprocessor controlled
132 x 64 pixel LCD display makes information easy to read
Front panel programming and also via PC software
Soft touch membrane keypad and five key menu navigation
Remote communications via RS232, RS485 and ethernet and SMS messaging
Event logging (50) showing date and time
Multiple date and time engine exercise mode and maintenance scheduler
Engine block heater control.
Controls; stop, manual, auto, test, start, mute lamp test/transfer to generator, transfer to mains, menu navigation.

• Instruments

ENGINE
Engine speed
Oil pressure
Coolant temperature
Run time
Battery volts
Engine maintenance due
GENERATOR
Voltage (L-L, L-N)
Current (L1-L2-L3)
Frequency
Earth current
kW
Pf
kVAr
kWh, kVAh, kVArh
Phase sequence
MAINS
Voltage (L-L, L-N)
Frequency

• Protection Circuits

WARNING
Charge failure
Battery under voltage
Fail to stop
Low fuel level (opt.)
kW over load
Negative phase sequence
Loss of speed signal
PRE-ALARMS
Low oil pressure
High engine temperature
Low engine temperature
Over /Under speed
Under/over generator
frequency
Under/over generator
voltage
ECU warning
SHUT DOWNS
Fail to start
Emergency stop
Low oil pressure
High engine temperature
Low coolant level
Over /Under speed
Under/over generator
frequency
Under/over generator voltage
Oil pressure sensor open
Phase rotation
ELECTRICAL TRIP
Earth fault
kW over load
Generator over current
Negative phase sequence

• Options

High oil temperature shut down
Low fuel level shut down
Low fuel level alarm
High fuel level alarm
EXPANSION MODULES
Editional LED module (2548)
Expansion relay module (2157)
Expansion input module (2130)


• Standards

Electrical Safety / EMC compatibility
BS EN 60950 Electrical business equipment
BS EN 61000-6-2 EMC immunity standard
BS EN 61000-6-4 EMC emission standard

• Static Battery Charger

6UHYfmVUf[Yf]g'a Ubi ZUM FYX'k Jh'gk JHV]b[!a cXY'UbX'GA 8 'HVX'bc'c[mUbX'ih\Ug'\][\ YZZM]bVW
6UHYfmVUf[Yf'a cXY'gfci hdi hJ !=VUfUUVf]ghW]g j YfmVWcgY'hc'gei UfY'&(\$) \Ug'Z `mci hdi hg\chVfVW]hdfchVW]cb'UbX
ihVUb'VY i gYX'Ug'U'WffYbhgci fVW"
&(\$) 'VUf[Yf'Ug'\][\ YZZM]bVW]cb["]Z'Z'ck 'ZU]i fY'fUfY'Z'[\hk Y][\hUbX'ck \YUhfUX]UfYX'Jb'UUVW'fXUbVW'k Jh' "]bYUf
U'fYfbUfj Yg"
H\Y'VUf[Yf]g'ZHYX'k Jh' U'dfchVW]cb'X]cXY'UUVcgghY'ci hdi H'7\Uf[Y'ZU]`ci hdi h]g'Uj U]UVY""7cbbYVWUf[Y'ZU]`fY'Um
Vt'`VYrk YYb'dcg]h] Y ci hdi hUbX'7: `ci hdi H'
=bdi h'%*!&*(J"
Ci hdi h'&+Z'J') 5'cf'% ž J') 5"

MS 70 - Canopy

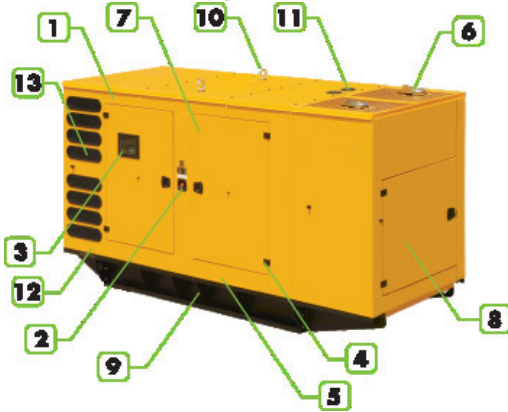

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the cap of the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

Introduction

Sound-attenuated and weather protective enclosures for generating sets from Abyaran, meet even the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

Standard Specifications

Compact footprint, low profile design.

Enclosure, generator set, exhaust system and fuel tank are pre-assembled, pre-integrated and shipped as one package

Body made from steel components treated with polyester powder coating

Fire retardant foam insulation

Easy access to all service points

Exhaust system inside canopy

Large doors on each side

Control panel viewing window in a lockable access door

Emergency stop push button mounted on enclosure exterior

Cooling fan and battery charging alternator fully guarded

Fuel fill and battery can only be reached via lockable access doors.

Lifting points on the top of canopy and base frame

Customer options available to meet your applications needs.

Abyaran makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been approved by the notified body Szutest

Width	mm.	1606
Length	mm.	4460
Height	mm.	2477
Fuel Tank Capacity	L	700