# » Generator set data sheet 1110 kVA Standby



# Our energy working for you.™

	Standby				Prime	Prime		
Fuel consumption	kW (k)	kW (kVA)			kW (kVA)			
Ratings	888 (1 <sup>-</sup>	888 (1110)		800 (1000)				
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
US gph	15.8	28.4	43.4	59.2	14.3	26.9	39.9	53.4
L/hr	60	107	164	224	54	102	151	202

Engine	Standby rating	Prime rating		
Engine manufacturer	Cummins			
Engine model	QST30G4			
Configuration	4-Cycle; 50° Vee; 12-0	Cylinder Diesel		
Aspiration	Turbocharged and Lov	v Temperature Aftercooled		
Gross engine power output, kWm	970	880		
BMEP at set rated load, kPa	2544	2310		
Bore, mm	140			
Stroke, mm	165			
Rated speed, rpm	1500			
Piston speed, m/s	8.3			
Compression ratio	14:1			
Lube oil capacity, L	133			
Overspeed limit, rpm	1800 ±50			
Regenerative power, kWm	58			
Governor type	Electronic			
Starting voltage	24 Volts DC			
Fuel flow				
Maximum fuel flow, L/hr	550			
Maximum fuel inlet restriction, mm Hg	203			
Maximum fuel inlet temperature (°C)	60			
Air				
Combustion air, m <sup>3</sup> /min	60.3	56.7		
Maximum air cleaner restriction, mm H <sub>2</sub> O	635			

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation. APSB-1154-07 (9/07)

Exhaust	Standby rating	Prime rating
Exhaust gas flow at set rated load, m <sup>3</sup> /min	178.8	164.8
Exhaust gas temperature, °C	575	565
Maximum exhaust back pressure, mmHg	51	

# Standard set-mounted radiator cooling


Standard Sci-mounted radiator cooming	9		
Ambient design, °C	40		
Fan load, KW <sub>m</sub>	17		
Coolant capacity (with radiator), L	302		
Cooling system air flow, m <sup>3</sup> /min @ 12.7mmH <sub>2</sub> O	1080		
Total heat rejection, BTU/min	28500 26390		
Maximum cooling air flow static restriction mmH <sub>2</sub> O	12.7		
Weights*	Open	Enclosed	
Unit dry weight kgs	7488	N.A.	
Unit wet weight kgs	7768	N.A.	


\* Weights represent a set with standard features. See outline drawing for weights of other configurations

Dimensions	Length "A"	Width "B"	Height "C"
Standard open set dimensions, mm	4469	1755	2248
Enclosed set standard dimensions, mm	20' container	-	-


## **Genset outline**


#### Open set

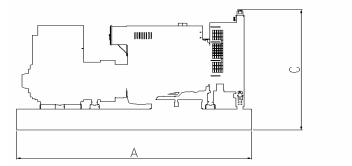



### Enclosed set





Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

### Our energy working for you.<sup>™</sup>

#### www.cumminspower.com

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation. APSB-1154-07 (9/07)



# **Alternator data**

Feature code	Connection <sup>1</sup>	Temp rise	Duty <sup>2</sup>	Alternator	Voltage
-	Wye, 3 Phase	125/105	S/P	HC6K	380-415V

# **Ratings definitions**

Standby:	Limited Time Running:	Prime (unlimited running time):	Base Load (Continuous):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	is in accordance with ISO 8528.	to varying electrical load for unlimited hours. Prime Power is in accordance with ISO 8528. Ten percent overload capability is available in accordance with	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous power in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

#### Notes:

- 1. Limited single phase capability is available from some three phase rated configurations. To obtain single phase rating, multiply the three phase kW rating by the single phase factor. All single phase ratings are at unity power factor.
- 2. Standby (S) and Prime (P) ratings.

# Formulas for calculating full load currents:

#### Three phase output

Single phase output

kW x 1000 Voltage x 1.732 x 0.8 <u>kW x 1000</u> Voltage

### See your distributor for more information.

### Cummins Power Generation Asia Pacific

10 Toh Guan Road #07-01 TT International Tradepark Tel: (65) 6417 2388 Fax: (65) 6417 2399 E-Mail: cpg.apmktg@cummins.com

### Our energy working for you.<sup>™</sup>

#### www.cumminspower.com

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation. APSB-1154-07 (9/07)

