Model: C2500 D5A

Frequency: 50 Fuel Type: Diesel

# » Generator set data sheet 2500 kVA Standby



# Our energy working for you.™

Standby		by			Prime			
Fuel consumption	kW (kVA) 2000 (2500)				kW (kVA) 1800 (2250)			
Ratings								
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
US gph	37.0	66.6	97.2	132.1	35.1	61.3	88.8	117.8
L/hr	140	252	368	500	133	232	336	446
Engine			Standl	oy rating		Prime	rating	
Engine manufacturer			Cummi	ns		•		
Engine model			QSK60	G8				
Configuration			4-Cycle; 60° Vee; 16-Cylinder Diesel					
Aspiration				Turbo Charged and Low Temperature Aftercooled				
Gross engine power output, kWm			2145	2145 1942				
BMEP at set rated load, kPa			2848	2848 2575				
Bore, mm			159					
Stroke, mm			190					
Rated speed, rpm			1500					
Piston speed, m/s			9.5					
Compression ratio			14.5:1					
Lube oil capacity, L			176					
Overspeed limit, rpm			1800 ±	50				
Regenerative power, kWm			146					
Governor type			Electronic					
Starting voltage			24 Volts DC					
Fuel flow								
Maximum fuel flow, L/hr			1515					
Maximum fuel inlet restriction, mm Hg			203					
Maximum fuel inlet temperature (°C)			60					
Air								
Combustion air, m³/min			156.2			145.2		
Maximum air cleaner restriction, mm H <sub>2</sub> O			635			•		


Exhaust	Standby rating	g Prime rating
Exhaust gas flow at set rated load, m³/min	378.7	344.1
Exhaust gas temperature, °C	485	460
Maximum exhaust back pressure, mmHg	51	·
Standard set-mounted radiator		
Ambient design, °C	40	
Fan load, KW <sub>m</sub>	33	
Coolant capacity (with radiator), L	621	
Cooling system air flow, m³/min @ 12.7mmH <sub>2</sub> O	1860	
Total heat rejection, BTU/min	66000	56100
Maximum cooling air flow static restriction mmH <sub>2</sub> O	12.7	
Weights*	Open	Enclosed
Unit dry weight kgs	17000	N.A.
Unit wet weight kgs	17720	N.A.

<sup>\*</sup> Weights represent a set with standard features. See outline drawing for weights of other configurations


Dimensions	Length "A"	Width "B"	Height "C"
Standard open set dimensions, mm	5842	2270	2800
Enclosed set standard dimensions, mm	Refer to factory	Refer to factory	Refer to factory

### **Genset outline**

#### Open set

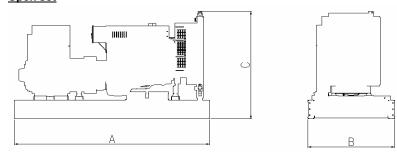

#### **Enclosed set**

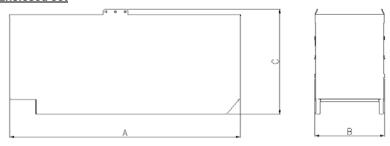

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

# Our energy working for you. $^{\text{TM}}$

#### www.cumminspower.com

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation.



APSB-1154-07 (9/07)

## **Alternator data**

Feature code	Connection <sup>1</sup>	Temp rise degrees C	Duty <sup>2</sup>	Alternator	Voltage
-	Wye, 3 Phase	125/105	S/P	P8	380-415V

## **Ratings definitions**

Standby:	Limited Time Running:	Prime (unlimited running time):	Base Load (Continuous):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	is in accordance with ISO 8528.	to varying electrical load for unlimited hours. Prime Power is in accordance with ISO 8528. Ten percent overload capability is available in accordance with	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous power in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

#### Notes:

- Limited single phase capability is available from some three phase rated configurations. To obtain single phase rating, multiply the three phase kW rating by the single phase factor. All single phase ratings are at unity power factor.
- 2. Standby (S) and Prime (P) ratings.

## Formulas for calculating full load currents:

Three phase output Single phase output

 kW x 1000
 kW x 1000

 Voltage x 1.732 x 0.8
 Voltage

See your distributor for more information.

# **Cummins Power Generation Asia Pacific**

10 Toh Guan Road #07-01

TT International Tradepark Tel: (65) 6417 2388 Fax: (65) 6417 2399

E-Mail: cpg.apmktg@cummins.com

Our energy working for you.  $^{\text{TM}}$ 

#### www.cumminspower.com

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation.

