


N67 TE2A

193 kW@1500 rpm

215 kW@1800 rpm

EU 2002/88/EC

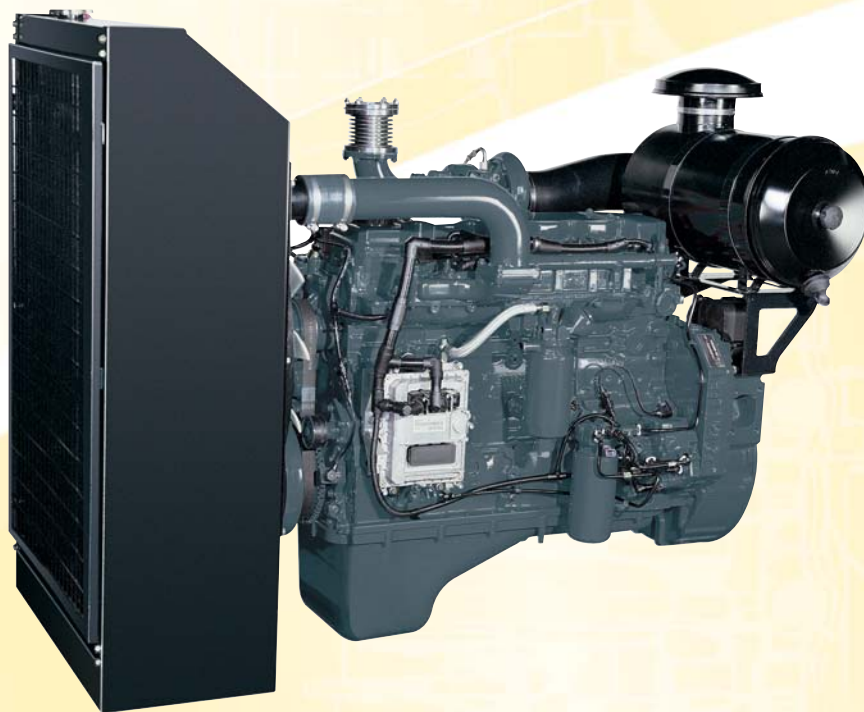

**ENGINE FOR
POWER GENERATION
APPLICATIONS**

N67 TE2A FOR POWER GENERATION APPLICATIONS

Specifications

Thermodynamic cycle		Diesel 4 stroke	
Air intake		TAA	
Arrangement		6, in line	
Bore x stroke	mm	104x132	
Total displacement	l	6.7	
Valves per cylinder		2	
Injection system		direct Common Rail	
Speed governor		electronic	
Cooling system		liquid (water + 50% Paraflu11)	
Flywheel housing/flywheel	type	SAE3 / 11" 1/2	
Flywheel rotation		CCW	
Lube oil specifications		ACEA E3-E5	
Lube oil consumption		<0.1% of fuel consumption	
Fuel specifications		EN 590	
Oil and filters intervals for replacement	hours	600	
Fuel consumption at:	rpm	1500	1800
	100% load l/h (g/kWh)	44 (205.5)	n.a.
	80% load l/h (g/kWh)	39 (207)	n.a.
	50% load l/h (g/kWh)	25.6 (217.5)	n.a.
Coolant capacity: engine only	l	~11	
	engine+radiator	l	~25.5
ATB (without canopy)	°C	55	
No remote cooling radiator allowed			
Lube oil total system capacity including pipes, filters etc.	l	~17	
Electrical system		12Vcc	
Starting batteries: recommended capacity	Ah	1x185	
Discharge current (EN 50342)	A	1200	
Cold starting:	without air preheating	°C -10	
	with air preheating	°C -25	

Performance

Ratings ¹		1500 rpm		1800 rpm	
		PRIME	STAND-BY	PRIME	STAND-BY
Rated Output ²	kWm	175	193	195	215

1) Ratings in accordance with ISO 8528. For duty at temperature over 40°C and/or altitude over 1000 meters must be considered a power derating factor. Contact the FPT sales organization

2) Net power at flywheel available after 50 hours running with a ±3% tolerance

PRIME POWER: The prime power is the maximum power available with varying loads for an unlimited number of hours. The average power output during a 24h period of operation must not exceed 80% of the declared prime power between the prescribed maintenance intervals and at standard environmental conditions. A 10% overload is permissible for 1 hour every 12 hours of operation.

STAND-BY POWER: The stand-by power is the maximum power available for a period of 500 hours/year with a mean factor of 90% of the declared stand-by power. No kind of overloads is permissible for this use.

CONTINUOUS POWER: Contact the FPT sales organization.

N67 TE2A FOR POWER GENERATION APPLICATIONS

Standard Configuration:

FPT engine N67 TE2A equipped with:

- Mounted radiator incorporating air-to-air charge cooler
- Front radiator guard
- Mounted belt driven pusher fan
- Fan guard
- Mounted air filter with replaceable cartridges
- Fuel filter
- Primary fuel filter/water separator
- Replaceable oil filter
- Electronic engine control unit with wiring loom and sensors
- Interface card
- Front engine mounting brackets
- Flywheel housing SAE3 and flywheel 11" 1/2
- Re-directable exhaust gas elbow
- Recircled oil breather system
- Oil dipstick
- 12Vdc electrical system
- User's handbook


THE ENGINE IS SUPPLIED WITHOUT LIQUIDS

Optional equipment:

On request the engine can be supplied with:

- Oil drain pump
- Oil drain valve
- 120/230 Volt water jacket heater
- WT and OP sensors for gauges
- Low water level sensor
- Turbo and exhaust gas guards
- Exhaust gas flexible joint
- 24Vdc electrical system

Overall dimensions

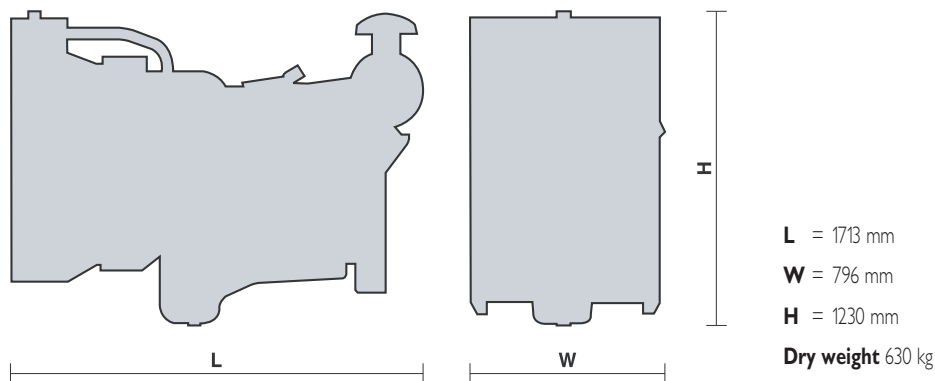

ENGINE BENEFITS

- **PERFORMANCE:** Lean lay-out; starting temperature down to -10°C; performance achieved without external EGR; power before derating up to 40°C and 1000 a.s.l.; first step load acceptance in class G3(ISO 8528-5)
- **SERVICEABILITY:** Worldwide service network
- **RELIABILITY:** By-pass valve on oil and fuel filters
- **COST EFFECTIVENESS:** New extended 600 h maintenance intervals (oil and fuel filters change); reduced oil and fuel consumption; new blow-by recirculation system
- **ENVIRONMENTALLY FRIENDLY:** Reduced noise; emission legislation compliance
- **CUSTOMER ORIENTATION:** On demand production; standard generator interface SAE; small size engines; consistency with standard and alternative fuels in compliance with regulatory requirements; complete engine power range