

9 LD 625/2



QUICK SPECIFICS


2
CYLINDER

25.5 | **18.8** @ 3000 rpm
HP kW


67.0 @ 2000 rpm
Nm

DATA

DIMENSIONS (mm)

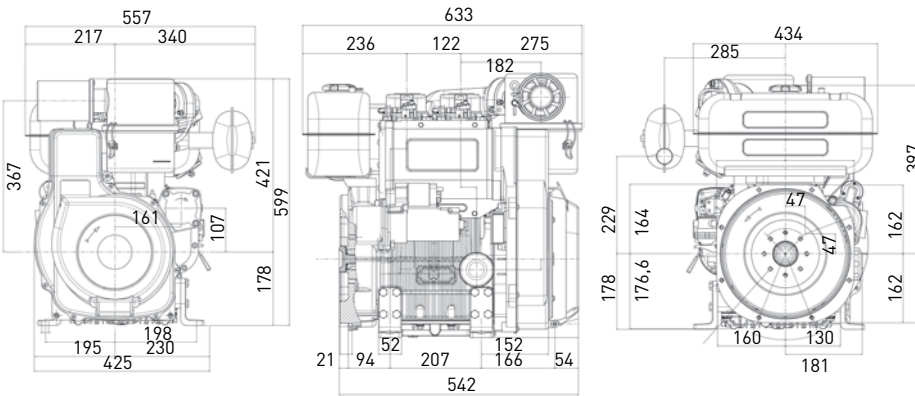

PERFORMANCE CURVES (IFN- ISO 3046 AND ISO 14396)

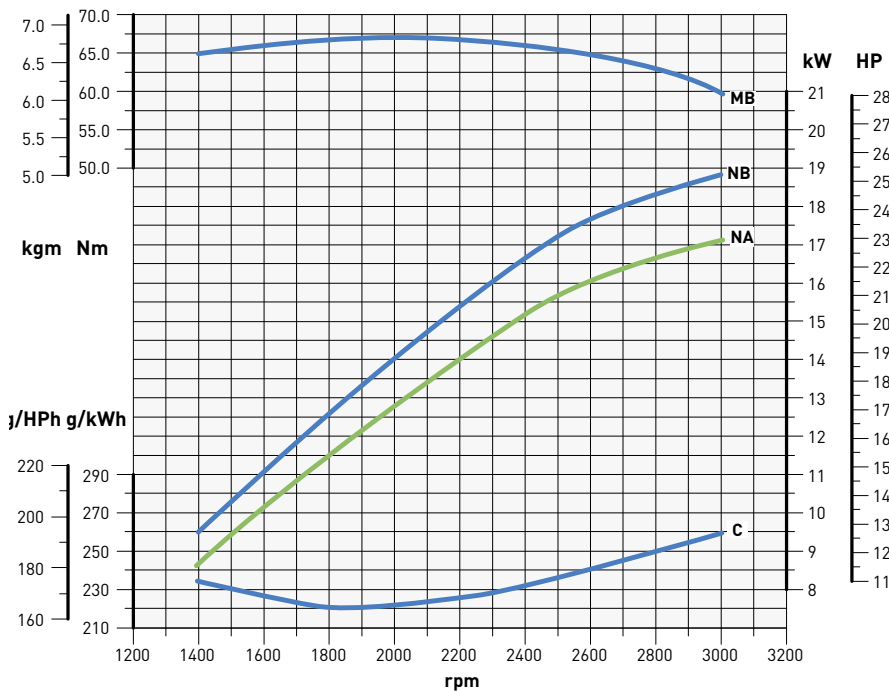

N - Power curve - 80/1269/CE E-ISO 1585

NB - Power curve - ISO 3046/1 -IFN

NA - Power curve - ISO 3046/1 - ICXN

MB - Torque curve - (NB curve)

C - Specific fuel consumption - (NB curve)

Power ratings refer to engines equiped with air filter, standard muffler, after being run in and in ambient conditions of 25°C and 1 bar. Power levels drop by 1% every 100m altitude and by 2% every 5°C above 25°C.

SETTING @ 2800 RPM

Max power N* (kW)	Max torque (Nm)
18.2 @ 2800 rpm	67.0 @ 2000 rpm