

Model: C150 D5  
 Frequency: 50  
 Fuel Type: Diesel

» Generator set data sheet

150 kVA Standby



Our energy working for you.™

Fuel consumption	Standby				Prime			
	kW (kVA)				kW (kVA)			
Ratings	120 (150)				109 (136)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
US gph	2.6	5.0	7.1	9.2	N.A.	N.A.	N.A.	N.A.
L/hr	10	19	27	35	N.A.	N.A.	N.A.	N.A.

Engine	Standby rating	Prime rating
Engine manufacturer	Cummins	
Engine model	6BTA5.9G2	
Configuration	4 Cycle; In-line; 6 Cylinder Diesel	
Aspiration	Turbocharged and Aftercooled	
Gross engine power output, kWm	145	132
BMEP at set rated load, kPa	1945	1750
Bore, mm	102	
Stroke, mm	120	
Rated speed, rpm	1500	
Piston speed, m/s	6	
Compression ratio	16.5:1	
Lube oil capacity, L	14.2	
Overspeed limit, rpm	1800 ±50	
Regenerative power, kWm	12.7	
Governor type	Electronic	
Starting voltage	12 Volts DC	

Fuel flow	
Maximum fuel flow, L/hr	30
Maximum fuel inlet restriction, mm Hg	102
Maximum fuel inlet temperature (°C)	60

Air		
Combustion air, m <sup>3</sup> /min	9	N.A
Maximum air cleaner restriction, mm H <sub>2</sub> O	635	

Exhaust	Standby rating	Prime rating
Exhaust gas flow at set rated load, m <sup>3</sup> /min	25.2	N.A
Exhaust gas temperature, °C	591	N.A
Maximum exhaust back pressure, mmHg	76	

Standard set-mounted radiator		
Ambient design, °C	50	
Fan load, KW <sub>m</sub>	2	
Coolant capacity (with radiator), L	25	
Cooling system air flow, m <sup>3</sup> /min @ 12.7mmH <sub>2</sub> O	138	
Total heat rejection, BTU/min	3800	N.A
Maximum cooling air flow static restriction mmH <sub>2</sub> O	12.7	


Weights*	Open	Enclosed
Unit dry weight kgs	1390	2060
Unit wet weight kgs	1710	2385

\* Weights represent a set with standard features. See outline drawing for weights of other configurations


Dimensions	Length "A"	Width "B"	Height "C"
Standard open set dimensions, mm	2220	1050	1577
Enclosed set standard dimensions, mm	3100	1060	1987

## Genset outline

### Open set

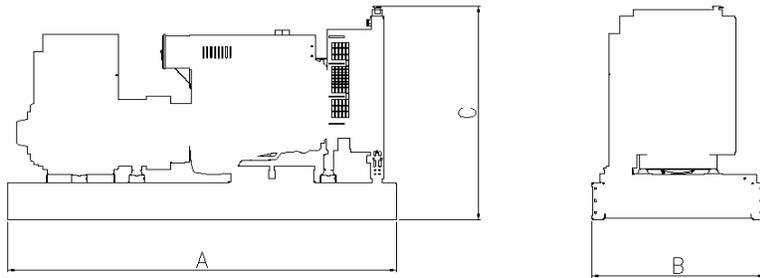

### Enclosed set

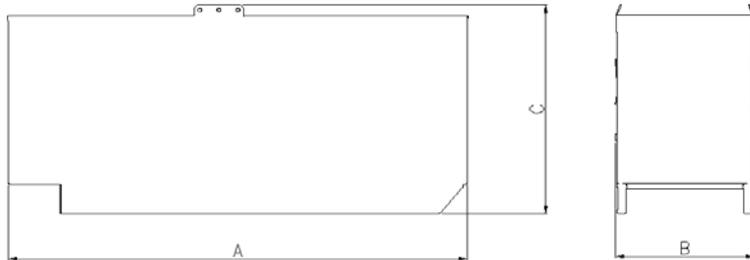

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Our energy working for you.™

[www.cumminspower.com](http://www.cumminspower.com)

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation.

APSB-1154-07 (9/07)



## Alternator data

Feature code	Connection <sup>1</sup>	Temp rise degrees C	Duty <sup>2</sup>	Alternator	Voltage
-	Wye, 3 Phase	163/125C	S/P	UC274E	380-415V

## Ratings definitions

Standby:	Limited Time Running:	Prime (unlimited running time):	Base Load (Continuous):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous power in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

### Notes:

- Limited single phase capability is available from some three phase rated configurations. To obtain single phase rating, multiply the three phase kW rating by the single phase factor. All single phase ratings are at unity power factor.
- Standby (S) and Prime (P) ratings.

## Formulas for calculating full load currents:

Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.732 \times 0.8}$$

Single phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Cummins Power Generation

Asia Pacific

10 Toh Guan Road #07-01

TT International Tradepark

Tel: (65) 6417 2388

Fax: (65) 6417 2399

E-Mail: [cpg.apmktg@cummins.com](mailto:cpg.apmktg@cummins.com)

Our energy working for you.™

[www.cumminspower.com](http://www.cumminspower.com)

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation.

APSB-1154-07 (9/07)

