

Model: C1675 D5  
 Frequency: 50  
 Fuel Type: Diesel

» Generator set data sheet

1675 kVA Standby



Our energy working for you.™

Fuel consumption	Standby				Prime			
	kW (kVA)				kW (kVA)			
Ratings	1340 (1675)				1125 (1406)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
US gph	24.3	43.7	66.8	91.1	21.7	40.9	58.6	76.3
L/hr	92	165	253	345	82	155	222	289

Engine	Standby rating	Prime rating
Engine manufacturer	Cummins	
Engine model	KTA50G8	
Configuration	4-Cycle; 60° Vee; 16-Cylinder Diesel	
Aspiration	Turbo Charged and Low Temperature Aftercooled	
Gross engine power output, kWm	1429	1200
BMEP at set rated load, kPa	2275	1910
Bore, mm	159	
Stroke, mm	159	
Rated speed, rpm	1500	
Piston speed, m/s	7.9	
Compression ratio	14.9:1	
Lube oil capacity, L	178	
Overspeed limit, rpm	1800 ±50	
Regenerative power, kWm	116	
Governor type	Electronic	
Starting voltage	24 Volts DC	

Fuel flow	
Maximum fuel flow, L/hr	570
Maximum fuel inlet restriction, mm Hg	203
Maximum fuel inlet temperature (°C)	60

Air	
Combustion air, m <sup>3</sup> /min	99.1   90
Maximum air cleaner restriction, mm H <sub>2</sub> O	635

<b>Exhaust</b>	Standby rating	Prime rating
Exhaust gas flow at set rated load, m <sup>3</sup> /min	261	231
Exhaust gas temperature, °C	510	485
Maximum exhaust back pressure, mmHg	51	

### Standard set-mounted radiator cooling

Ambient design, °C	40	
Fan load, KW <sub>m</sub>	30	
Coolant capacity (with radiator), L	400	
Cooling system air flow, m <sup>3</sup> /min @ 12.7mmH <sub>2</sub> O	1560	
Total heat rejection, BTU/min	52430	42210
Maximum cooling air flow static restriction mmH <sub>2</sub> O	12.7	

### Weights\*

	Open	Enclosed
Unit dry weight kgs	11300	N.A.
Unit wet weight kgs	12000	N.A.


\* Weights represent a set with standard features. See outline drawing for weights of other configurations

### Dimensions


	Length "A"	Width "B"	Height "C"
Standard open set dimensions, mm	5637	2250	2250
Enclosed set standard dimensions, mm	40' container	-	-

### Genset outline

#### Open set

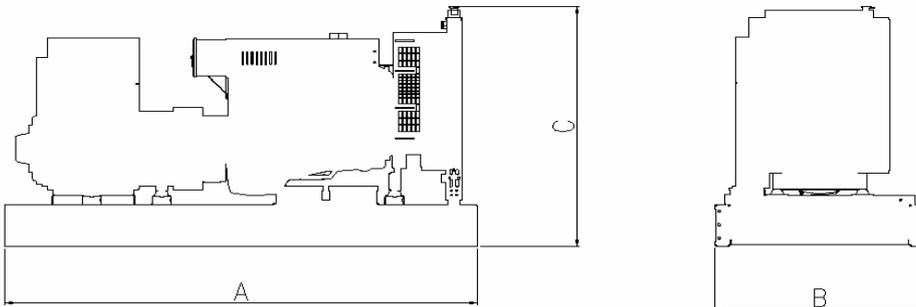

#### Enclosed set

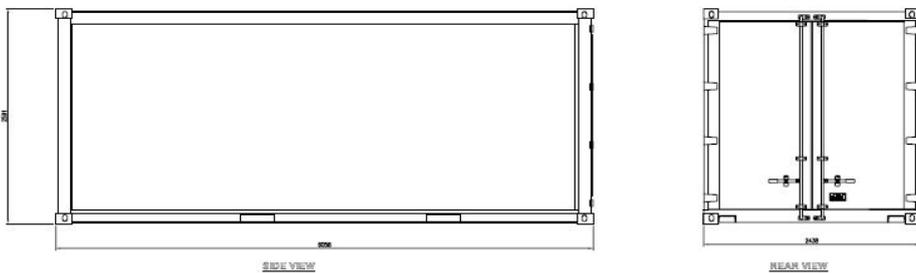

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Our energy working for you.™

[www.cumminspower.com](http://www.cumminspower.com)

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation. APSB-1154-07 (9/07)



## Alternator data

Feature code	Connection <sup>1</sup>	Temp rise	Duty <sup>2</sup>	Alternator	Voltage
-	Wye, 3 Phase	150/125	S/P	P7D	380-415V

## Ratings definitions

Standby:	Limited Time Running:	Prime (unlimited running time):	Base Load (Continuous):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous power in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

### Notes:

- Limited single phase capability is available from some three phase rated configurations. To obtain single phase rating, multiply the three phase kW rating by the single phase factor. All single phase ratings are at unity power factor.
- Standby (S) and Prime (P) ratings.

## Formulas for calculating full load currents:

Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.732 \times 0.8}$$

Single phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Cummins Power Generation

Asia Pacific

10 Toh Guan Road #07-01

TT International Tradepark

Tel: (65) 6417 2388

Fax: (65) 6417 2399

E-Mail: [cpg.apmktg@cummins.com](mailto:cpg.apmktg@cummins.com)

Our energy working for you.™

[www.cumminspower.com](http://www.cumminspower.com)

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation. AP5B-1154-07 (9/07)

