


# VOLVO PENTA GENSET ENGINE

# TD520GE


1500 rpm, 85 kW (116 hp) – 1800 rpm 89 kW (121 hp)

## TD520GE


Turbocharged \_\_\_\_\_  
 Diesel fuel \_\_\_\_\_  
 Displacement indication (l) \_\_\_\_\_  
 Generation \_\_\_\_\_  
 Version \_\_\_\_\_  
 Generator drive \_\_\_\_\_  
 Emission controlled \_\_\_\_\_

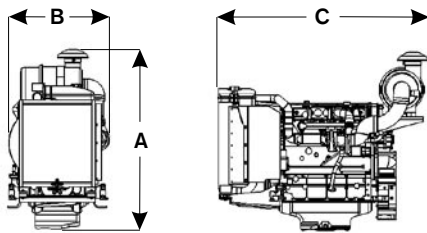

A = 1171 / 46.1  
 B = 664 / 26.1  
 C = 1392 / 54.8

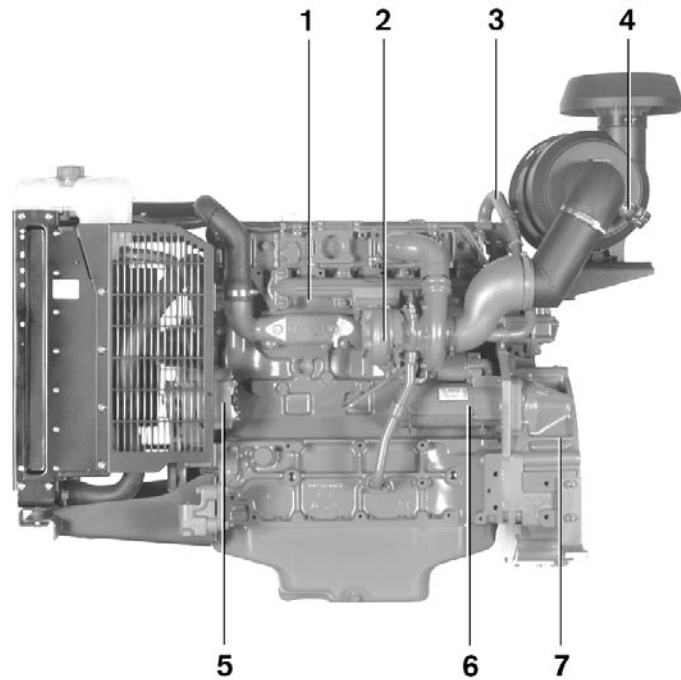

1. Exhaust manifold
2. Turbocharger
3. Closed loop crank case breather system
4. Air restriction indicator
5. Alternator
6. Starter motor
7. Flywheel housing SAE 3
8. Air filter
9. Speed governor
10. Stop solenoid
11. Oil filling
12. Oil cooler
13. Exp. tank with filler cap
14. Engine transmission with PTO
15. Oil filter
16. Fuel filter
17. Radiator

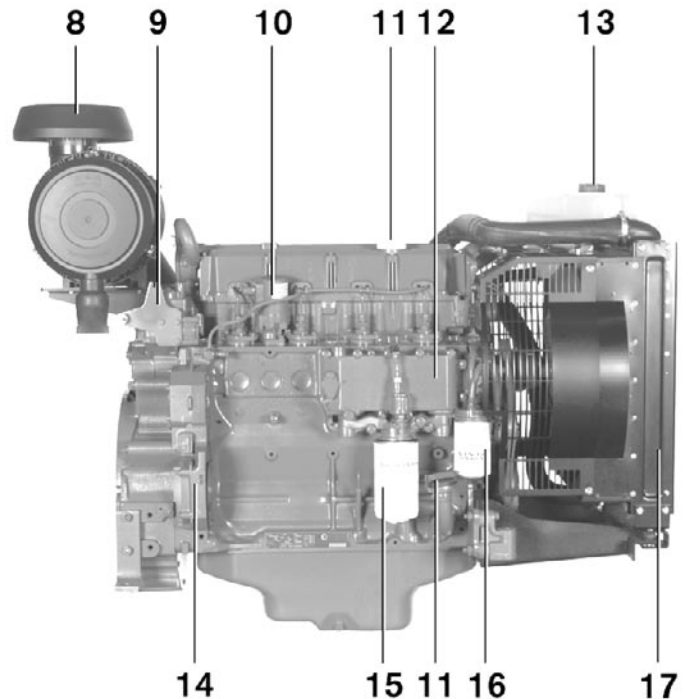

**VOLVO  
PENTA**

## Technical Data

### General

In-line four-stroke diesel engine with direct injection  
Turbocharged and air to air intercooled  
Rotation direction, anti-clockwise viewed towards flywheel

Number of cylinders 4  
Displacement, total 4.76 liter / 290 in<sup>3</sup>  
Firing order 1-3-4-2  
Bore 108 mm / 4.25 in  
Stroke 130 mm / 5.12 in  
Compression ratio 17.5:1

Dry weight, kg / lb Engine incl. coolingsystem 550 / 1213  
Wet weight, kg / lb Engine incl. coolingsystem 580 / 1279

TD520GE	Speed, rpm	1500	1800
<b>Performance</b>			
Prime Power without fan	kW / hp	77.5 / 105.4	81.5 / 110.8
Standby Power with fan	kW / hp	85.0 / 116.0	89.0 / 121.0
Fan power consumption			
Standard cooling system	kW / hp	2.5 / 3.4	4.3 / 5.8
Tropical cooling system	kW / hp	2.5 / 3.4	4.3 / 5.8
Mean piston speed	m/s / ft/sec	6.5 / 21.3	7.8 / 25.6
Effective mean pressure at Standby Power	MPa / psi	1.4 / 203	1.2 / 174
Max combustion pressure at Prime Power	MPa / psi	11.2 / 1624	11.3 / 1639
Total mass moment of inertia, J ( mR <sup>2</sup> )	kgm / lbft <sup>2</sup>	1.43 / 33.8	

### Lubrication system

Lubricating oil consumption  
    at Prime Power liter/h / US gal/h 0.065 / 0.017  
Oil system capacity including filters liter / US gal 13 / 3.4

### Fuel system

Specific fuel consumption at  
    50% of Prime Power g/kWh / lb/hph 213 / 0.345  
    75% of Prime Power g/kWh / lb/hph 208 / 0.337  
    100% of Prime Power g/kWh / lb/hph 213 / 0.345

### Intake and exhaust system

Air consumption at Standby Power (at 25 °C) m<sup>3</sup>/h / cu.ft/h 285 / 10065  
Max allowable air intake restriction kPa / In wc 3 / 12  
Heat rejection to exhaust at Standby Power kW / BTU/min 71.1 / 4078  
Exhaust gas temperature after turbine  
    at Standby Power °C / °F 610 / 1130  
Max allowable back-pressure in exhaust line kPa / In wc 3 / 12  
Exhaust gas flow at Standby Power m<sup>3</sup>/min / cfm 15.4 / 544

### Cooling system

Heat rejection radiation from engine  
    at Standby Power kW / BTU/min 12.7 / 722  
Heat rejection to coolant  
    at Standby power kW / BTU/min 53.7 / 3020  
Fan power consumption  
    standard and tropical cooling system kW / hp 2.5 / 3.4

### Power Standards

The engine performance corresponds to ISO 3046, BS 5514 and DIN 6271. The technical data applies to an engine without cooling fan and operating on a fuel with calorific value of 42.7 MJ/kg (18360 BTU/lb) and a density of 0.84 kg/liter (7.01 lb/US gal), also where this involves a deviation from the standards. Power output guaranteed within 0 to +2% att rated ambient conditions at delivery. Ratings are based on ISO 8528.  
Engine speed governing in accordance with ISO 3046/IV, class A1 and ISO 8528-5 (G3 with electronic speed governor)

### Rating Guidelines

PRIME POWER rating corresponds to ISO Standard Power for continuous operation. It is applicable for supplying electrical power at variable load for an unlimited number of hours instead of commercially purchased power. A10 % overload capability is available for this rating.  
STANDBY POWER rating corresponds to ISO Standard Fuel Stop Power. It is applicable for supplying standby electrical power at variable load in areas with well established electrical networks in the event of normal utility power failure. No overload capability is available for this rating.

# VOLVO PENTA

### Exhaust emissions.

The engine exhaust emissions complies with EPA, CARB and TA-luft regulations.

AB Volvo Penta  
SE-405 08 Göteborg, Sweden