

# PowerTech™


## 6068HF275 Diesel Engine

Generator Drive Engine Specifications



6068HF275 shown

### Dimensions

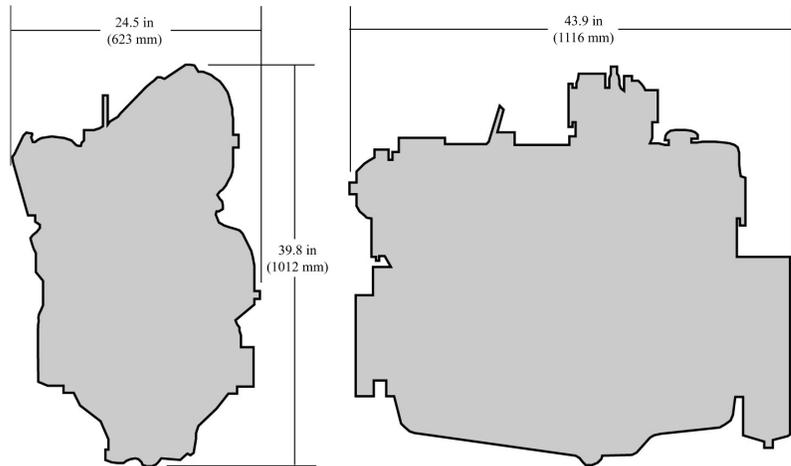

### Certifications

CARB  
EPA Tier 2

### General data

Model	6068HF275	Aspiration	Turbocharged and air-to-air aftercooled
Number of cylinders	6	Length - mm (in)	1116 (43.9)
Displacement - L (cu in)	6.8 (415)	Width - mm (in)	623 (24.5)
Bore and Stroke-- mm (in)	106 x 127 (4.17 x 5.00)	Height-- mm (in)	1012 (39.8)
Compression Ratio	17.0:1	Weight, dry-- kg (lb)	587 (1294)
Engine Type	In-line, 4-Cycle		


### Performance data

Prime power at 60 Hz (1800 rpm)	149 kW (200 hp)
Standby power at 60 Hz (1800 rpm)	164 kW (220 hp)

The prime power gen-set engine rating is the nominal power an engine is capable of delivering with a variable load for an unlimited number of hours per year with normal maintenance intervals observed. This rating incorporates a 10% overload capability which is available for up to 2 hours at a time. Operating time between 100% and 110% of the prime power rating is not to exceed 8% of the total engine operating time. This rating conforms to ISO 8528-1 "prime power (PRP)". The permissible average power for the prime or PRP rating is not to exceed 70% of rated prime power when calculated per ISO 8528-1.

The standby gen-set engine rating is the nominal engine power available at varying load factors for up to 200 hours per year with normal maintenance intervals observed. No overload capability is available for this rating. This rating conforms to ISO 8528-1 "Emergency Standby Power (ESP)". The permissible average power for the standby or ESP rating is calculated per ISO 8528-1.

## Performance curve

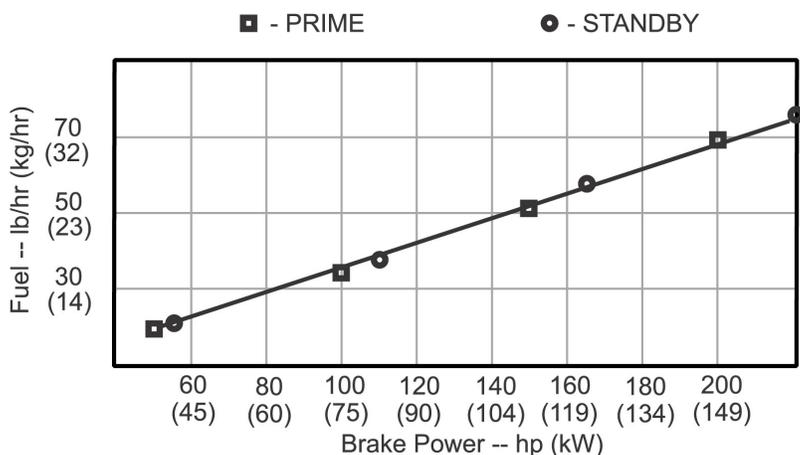

## Performance data

Hz (rpm)	Generator efficiency %	Rated fan power		Power factor	Calculated generator set output			
		kW	hp		Prime		Standby	
					kWe	kVA	kWe	kVA
60 (1800)	88-92	8.2	11.0	0.8	124-130	155-162	137-143	171-179

## Features and benefits

### Dynamically Balanced Crankshaft

- Induction-hardened journals for long hours of reliable service
- Robust design to drive machinery from the front of the crankshaft
- Supported by seven main bearings

### Forged-Steel Connecting Rods

- 45-degree connecting rod/cap-joint design allows the use of large connecting rod bearings for increased durability

### Replaceable Wet-type Cylinder Liners

- Provide excellent heat dissipation
- Precision machined for long life
- Rebuild to original specifications

### Easy to Apply, Easy to Install

- Front and rear engine mounting pads on the side of the block facilitates installation
- Auxiliary drive rated to 50 hp (37 kW) intermittent for powering ancillary equipment
- Either side service for filters and service points facilitates packaging
- All connection points in common locations make it easy to install or package

### Compact Size

- Short length is ideal for both skid and packaged installations
- High mount or low mount turbocharger position to meet packaging requirements

### World-class performance

- Excellent fuel economy and low oil consumption

### Fuel System Controls

- Electronically controlled rotary fuel injection pump with variable timing result in excellent fuel economy and excellent performance
- Self diagnostics and protection
- 3-5% Droop Governing
- 12V or 24V Electric Shutoff

### Emissions

- EPA Tier 2 Certified