



#### ISO8528

This generator set has been designed to meet ISO 8528 regulation.

#### SZUTEST

This generator set is manufactured in facilities certified to ISO 9001.



This generator set is available with CE certification.

#### 2000/14/EC

Enclosed product is tested EU noise legislation 2000/14/EC

#### 3 Phase Ratings, 60 Hz, PF 1,0

| Voltage | Standby Rating (ESP) |        | Prime Rating (PRP) |        |        |
|---------|----------------------|--------|--------------------|--------|--------|
|         | kVA                  | kW     | kVA                | kW     | Amp    |
| 480/277 |                      | 248,00 |                    | 216,00 | 325,00 |
| 380/220 |                      | 227,00 |                    | 206,00 | 391,00 |
| 208/120 |                      | 248,00 |                    | 214,00 | 743,00 |

Standby Rating (ESP): Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. ESP is in accordance with ISO 8528. Overload is not allowed.

Prime Rating (PRP): Applicable for supplying power to varying electrical load for unlimited hours. PRP is in accordance with ISO 8528. 10 % overload capability is available for a period of 1 hour within 12-hour period of operation, in accordance with ISO 3046.

#### STANDARD SPECIFICATIONS

- Heavy duty, water cooled diesel engine
- Radiator with mechanical fan
- Protective grille for fan and rotating parts
- Electric starter and charge alternator
- Starting battery (with lead acid) including rack and cables
- Engine jacket cooling heater
- Steel base frame and anti-vibration isolators
- Spare Fuel Tank
- Flexible fuel connection hoses
- Single bearing, class H alternator
- Industrial exhaust silencer and steel belows supplied separately
- Static battery charger
- Manual for use and installation



## OPTIONAL EQUIPMENTS

### ENGINE

- Fuel-Water Separator Filter
- Low water level alarm
- Oil heater

### ALTERNATOR

- Anti-Condensation Heater
- Over sized alternator
- PMG excitation + AVR
- Main line circuit breaker

### CONTROL SYSTEM

- Earth fault, single set
- Charge Ammeter

### OTHER ACCESSORIES

- Automatic or manual fuel filling system
- Manual oil drain pump
- Electrical oil drain pump
- Residential silencer
- Enclosure: weather protective or sound attenuated
- Duct adapter ( on radiator)
- Inlet and outlet motorised louvers
- Inlet and outlet acoustic baffles
- Trailer
- Tool kit for maintenance
- 1500/3000 hours maintenance kit
- Double wall chassis
- Supplied with oil and coolant - 30 °C
- Battery isolating switch
- Main Fuel Tank
- Automatic transfer switch

### TRANSFER SWITCH

- 
- Four Pole Contactor

## ➤ DIESEL ENGINE SPECIFICATIONS

|                            |                      |                                |       |       |                                 |
|----------------------------|----------------------|--------------------------------|-------|-------|---------------------------------|
| Manufacturer               |                      | John Deere                     |       |       | تولید کننده                     |
| Model                      |                      | 6081 HF                        |       |       | مدل                             |
| No. of Cylindirs and Build |                      | 6 Cylinder, In Line            |       |       | تعداد سیلندرها و نوع آرایش آنها |
| Aspiration and Cooling     |                      | Turbo Charged and After Cooled |       |       | سیستم تنفس و خنک کاری           |
| Total Displacement         | L                    | 8,10                           |       |       | جابه جایی کل                    |
| Bore and Stroke            | mm                   | 116 X 129                      |       |       | قطر سیلندر و کورس پیستون        |
| Compression Ratio          |                      | 15.7:1                         |       |       | نسبت تراکم                      |
| Rated Speed (rpm)          | rpm                  | 1800                           |       |       | سرعت مجاز                       |
| Governor                   |                      | Mechanical                     |       |       | گاورنر                          |
| Oil Capacity               | L                    | 32,00                          |       |       | ظرفیت روغن                      |
| Coolant Capacity           | L                    | 44,00                          |       |       | ظرفیت خنک کننده                 |
| Intake Air Flow            | m <sup>3</sup> /min. | 21,20                          |       |       | جریان هوای مصرفی                |
| Exhaust Gas Flow           | m <sup>3</sup> /min. | 58,00                          |       |       | جریان گاز خروجی از اگزوز        |
| Exhaust Gas Tempratures    | ° C                  | 514                            |       |       | دمای گاز خروجی از اگزوز         |
| Start System               |                      | 12 V d.c.                      |       |       | استارتر                         |
| Fuel Consumption           | Load                 | %100                           | %75   | %50   | مصرف سوخت                       |
|                            | L/h                  | 64,80                          | 47,90 | 32,00 |                                 |


## ➤ ALTERNATOR SPECIFICATIONS

|                   |     |                                      |                |
|-------------------|-----|--------------------------------------|----------------|
| Make              |     | Stamford                             | تولید کننده    |
| Model             |     | UCI 274K                             | مدل            |
| Frequency         | Hz  | 60                                   | فرکانس         |
| Power             | kVA | 250                                  | توان           |
| Design            |     | Brushless, 4 poles                   | طراحی          |
| Cos Phi           |     | 0,80                                 | کسینوس فی      |
| Phase             |     | 3                                    | فاز            |
| Voltage           | V   | 480/277                              | ولتاژ          |
| Current           | A   | 375                                  | جریان          |
| Insulation Class  |     | H                                    | کلاس عایق بندی |
| Temperatur        |     | H                                    | دما            |
| Stator            |     | 2 / 3 steps                          | استاتور        |
| Rotor             |     | Single Bearing System, Flexible Disc | روتور          |
| Excitation System |     | Electronic ( AVR )                   | سیستم تحریک    |

## ➤ DIEMENSIONS AND WEIGHT

| Open Type             | Dry Weight | Lenght | Width | Height | Tank Capacity |
|-----------------------|------------|--------|-------|--------|---------------|
|                       | kg.        | mm.    | mm.   | mm.    | L             |
| AJD 248-6             | 2150       | 2270   | 1150  | 1800   | 420           |
| Sound Attenuated Type | Dry Weight | Lenght | Width | Height | Tank Capacity |
|                       | kg.        | mm.    | mm.   | mm.    | L             |
| AK 60                 | 2910       | 3800   | 1210  | 2000   | 500           |

## 1 P 732 control system - Control System

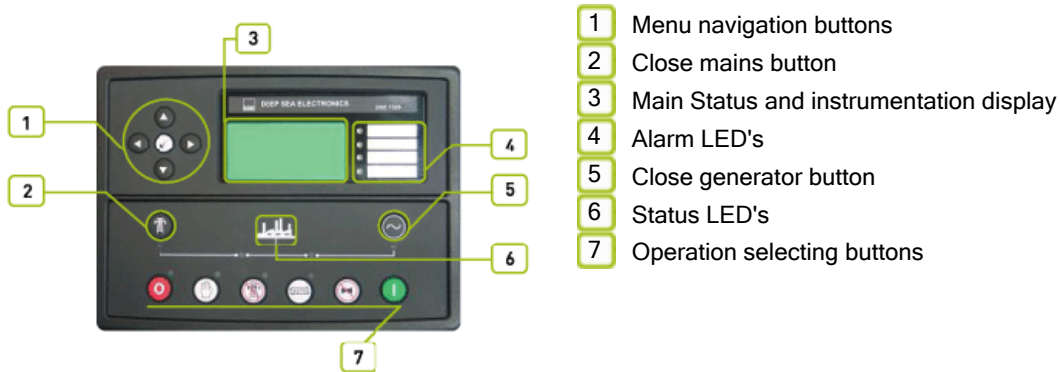

## 2 Devices

DSE, model 7320 Auto Mains Failure control module  
 Static battery charger 5A, 220/240 volt  
 Emergency stop push button and fuses for control circuits

## 3 Construction and Finish

Components installed in sheet steel enclosure. Phosphate chemical, pre-coating of steel provides corrosion resistant surface  
 Polyester composite powder topcoat forms high gloss and extremely durable finish  
 Lockable hinged panel door provides for easy component access

## 4 Installation

Control panel is mounted generating set baseframe on robust steel stand or power module.  
 Located at side of generating set with properly panel visibility.

## 5 Generating Set Control Unit

The DSE 7320 control module is a standard addition to our generator sets from 250kVA upwards and it has been designed to start and stop diesel and gas generating sets that include electronic and non-electronic engines. The DSE 7320 includes the additional capability of being able to monitor a mains (utility) supply and is therefore suitable for controlling a standby generating set in conjunction with an automatic transfer switch. The DSE 7320 also indicates operational status and fault conditions, automatically shutting down the generating set and indicating faults by means of its LCD display on the front panel.

### Standard Specifications

Microprocessor controlled  
 132 x 64 pixel LCD display makes information easy to read  
 Front panel programming and also via PC software  
 Soft touch membrane keypad and five key menu navigation  
 Remote communications via RS232, RS485 and ethernet and SMS messaging  
 Event logging (50) showing date and time  
 Multiple date and time engine exercise mode and maintenance scheduler

## • Instruments

ENGINE  
Engine speed  
Oil pressure  
Coolant temperature  
Run time  
Battery volts  
Engine maintenance due  
GENERATOR  
Voltage (L-L, L-N)  
Current (L1-L2-L3)  
Frequency  
Earth current  
kW  
Pf  
kVA<sub>r</sub>  
kWh, kVA<sub>h</sub>, kVA<sub>r</sub><sub>h</sub>  
Phase sequence  
MAINS  
Voltage (L-L, L-N)  
Frequency

## • Protection Circuits

WARNING  
Charge failure  
Battery under voltage  
Fail to stop  
Low fuel level (opt.)  
kW over load  
Negative phase sequence  
PRE-ALARMS  
Low oil pressure  
High engine temperature  
Low engine temperature  
Over /Under speed  
Under/over generator  
frequency  
Under/over generator  
voltage  
ECU warning  
SHUT DOWNS  
Fail to start  
Emergency stop  
Low oil pressure  
High engine temperature  
Low coolant level  
Over /Under speed  
Under/over generator  
frequency  
Under/over generator voltage  
Oil pressure sensor open  
Phase rotation  
ELECTRICAL TRIP  
Earth fault  
kW over load  
Generator over current  
Negative phase sequence

## • Options

High oil temperature shut down  
Low fuel level shut down  
Low fuel level alarm  
High fuel level alarm  
EXPANSION MODULES  
Editional LED module (2548)  
Expension relay module (2157)  
Expansion input module (2130)

## • Standards

Electrical Safety / EMC compatibility  
BS EN 60950 Electrical business equipment  
BS EN 61000-6-2 EMC immunity standard  
BS EN 61000-6-4 EMC emission standard

## • Static Battery Charger

Battery charger is manufactured with switching-mode and SMD technology and it has high efficiency.

Battery charger models' output V-I characteristic is very close to square and output is 5 amper, 24 volt DC. Input 198 - 260 volt AC. 2405 has fully output short circuit protection and it can be used as a current source.

2405 charger has high efficiency, long life, low failure rate, light weight and low heat radiated in accordance with linear alternatives.

The charger is fitted with a protection diode across the output. Charge fail output is available. Connect charge fail relay coil between positive output and CF output.

## AK 60 - Canopy



## Introduction

Sound-attenuated and Weather-protective Enclosures Sound-attenuated and weather protective enclosures for generating sets from abyaran meet event the sound requirements and provide optimum protection from inclement weather and development by our specialist acoustic engineers. Our modular designed sound insulated canopies (300 - 1100kVA) provide ease of access for servicing and general maintenance and interchangeable components permitting on-site repair. Enclosures are designed to optimize genset cooling performance, providing you with confidence that genset ratings and ambient capability.

## Standard Specifications

Compact footprint, low profile design.

Enclosure, generator set, exhaust system and fuel tank are pre-ssembled, pre-integrated and shipped as one package

Body made from steel components treated with polyester powder coating

Fire retardant foam insulation

Easy access to all service points

Exhaust system inside canopy

Large doors on each side

Control panel viewing window in a lockable access door

Emergency stop push button mounted on enclosure exterior

Cooling fan and battery charging alternator fully guarded

Fuel fill and battery can only be reached via lockable access doors.

Lifting points on the top of canopy and base frame

Customer options available to meet your applications needs. abyaran

makes its generating sets' noise level tests in accordance with directive 2000/14/EC validation of the noise level test has been aproved by the notified body Szutest

|                    |     |      |
|--------------------|-----|------|
| Width              | mm. | 1210 |
| Lenght             | mm. | 3800 |
| Height             | mm. | 2000 |
| Fuel Tank Capacity |     | 500  |