Model: C125 D5 Frequency: 50 Fuel Type: Diesel

» Generator set data sheet 125 kVA Standby



Our energy working for you.™

Maximum air cleaner restriction, mm H₂O

	Standby			Prime				
Fuel consumption	kW (kVA)			kW (kVA)				
Ratings	25)	5)			90 (113)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
US gph	2.1	4.5	6.6	8.7	2.1	4.0	5.8	7.9
L/hr	8	17	25	33	8	15	22	30
Engine			Stand	by rating		Prime	rating	
Engine manufacturer			Cumm	ins		· ·		
Engine model			6BTA5	i.9G2-I				
Configuration			4 Cycle; In-line; 6 Cylinder Diesel					
Aspiration			Turbo Charged and Jacket Water Aftercooled					
Gross engine power output, kWm			125 116					
BMEP at set rated load, kPa			1700 1579					
Bore, mm			102					
Stroke, mm			120					
Rated speed, rpm			1500					
Piston speed, m/s			7.2					
Compression ratio			17.3:1					
Lube oil capacity, L			14.3					
Overspeed limit, rpm			1800±	50				
Regenerative power, kWm			12.7					
Governor type			Mechanical					
Starting voltage			12 Vol	ts DC				
Fuel flow								
Maximum fuel flow, L/hr			30					
Maximum fuel inlet restriction, mm Hg			102					
Maximum fuel inlet temperature (°C)			60					
Air								
Combustion air, m³/min			7.9			7.4		
8.6 1 1 1 4 1 4 1 4 1 1 1 1 1 1 1 1 1 1 1	_							

635


Exhaust	Standby rating	g Prime rating
Exhaust gas flow at set rated load, m³/min	22.8	20.7
Exhaust gas temperature, °C	636	614
Maximum exhaust back pressure, mmHg	76	·
Standard set-mounted radiator		
Ambient design, °C	50	
Fan load, KW _m	2	
Coolant capacity (with radiator), L	25	
Cooling system air flow, m³/min @ 12.7mmH ₂ O	138	
Total heat rejection, BTU/min	4155	3757
Maximum cooling air flow static restriction mmH ₂ O	12.7	·
Weights*	Open	Enclosed
Unit dry weight kgs	1280	1950
Unit wet weight kgs	1605	2275

^{*} Weights represent a set with standard features. See outline drawing for weights of other configurations


Dimensions	Length "A"	Width "B"	Height "C"
Standard open set dimensions, mm	2220	1050	1577
Enclosed set standard dimensions, mm	3100	1060	1987

Genset outline

Open set

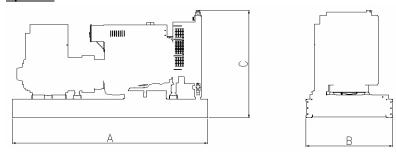

Enclosed set

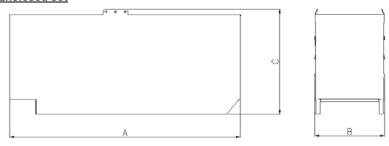

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Our energy working for you. $^{\text{TM}}$

www.cumminspower.com

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation.



Alternator data

Feature code	Connection ¹	Temp rise degrees C	Duty ²	Alternator	Voltage
-	Wye, 3 Phase	163/125C	S/P	UC274V	380-415V

Ratings definitions

Standby:	Limited Time Running:	Prime (unlimited running time):	Base Load (Continuous):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.	is in accordance with ISO 8528.	to varying electrical load for unlimited hours. Prime Power is in accordance with ISO 8528. Ten percent overload capability is available in accordance with	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous power in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

Notes:

- Limited single phase capability is available from some three phase rated configurations. To obtain single phase rating, multiply the three phase kW rating by the single phase factor. All single phase ratings are at unity power factor.
- 2. Standby (S) and Prime (P) ratings.

Formulas for calculating full load currents:

Three phase output Single phase output

 kW x 1000
 kW x 1000

 Voltage x 1.732 x 0.8
 Voltage

See your distributor for more information.

Cummins Power Generation

Asia Pacific

10 Toh Guan Road #07-01 TT International Tradepark Tel: (65) 6417 2388 Fax: (65) 6417 2399

E-Mail: cpg.apmktg@cummins.com

Our energy working for you. $^{\text{TM}}$

www.cumminspower.com

©2007 Cummins Power Generation Inc. All rights reserved. Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. "Our energy working for you." is a trademark of Cummins Power Generation.



APSB-1154-07 (9/07)